

MCB

145 C

ARKASIL

Type

Maximum system voltage

PDD-27-15-028

PRODUCT DESCRIPTION

Pre-moulded outdoor joint MCB 145 C is designed to connect two XLPE 76/132 kV high voltage cables. Joint MCB 145 C has direct connection of screen wires.

Joint MCB 145 C contains:

- Silicone pre-molded joint body
- Special tapes for different purposes
- Copper casing
- Protective covering from heat shrinkable tubes and sleeves (optionally other protective covering)


BASIC COMPONENTS

INSULATOR

- Silicone pre-molded joint body with conductive elements for electrical field control.

CONNECTOR AND SEALING MATERIALS

- Compression sleeve (copper or aluminum depends on cable conductor).
- Sealing and fixing materials
- Optionally it could be sleeve with screws

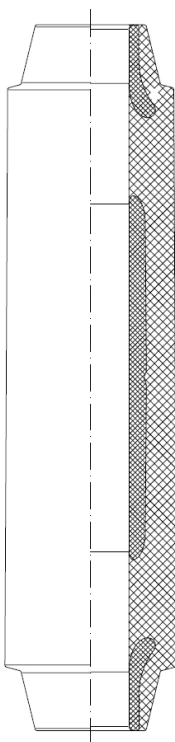

MCB 145 C

ARKASIL

Type **Maximum system voltage**

PDD-27-15-028

AREA OF APPLICATIONS

Type	MCB 145 C
Maximum system voltage, kV	145
Cable conductor cross section, mm ²	185 ÷ 2000
Maximum outer sheath diameter, mm	115
Maximum cable insulation diameter(prepared), mm	91

TECHNICAL DATA

Type	MCB 145 C
Electrical data:	
AC voltage withstand test	190 kV for 30 min
Impulse withstand voltage (10+/10- impulses)	650 kV
Partial discharge test	< 5 pC at 114 kV
Climatic data:	
Climatic version	- 45°C/ + 50°C
Nominal operating current	Limited by cable specification
Short circuit current	Limited by cable specification
Sheath withstand voltages:	
DC voltage, kV	25 kV for 1 min
Mechanical data:	
Approximate weight, kg	55

ALL TYPE TESTS ACCORDING TO REQUIRMENTS

IEC 60840

MOUNTING

MCB 145 C must be mounted by trained/certified personnel. Mounting area must be protected from dust and moisture. Temperature of mounting should be from +10 to +40 C.

MCB

145 C

ARKASIL

Type

Maximum system voltage

PDD-27-15-028

TYPICAL DRAWING

